


RRMS S-2S COURIER INSTRUMENTS AND ELECTRICAL

*** REFER TO 912S ENGINE

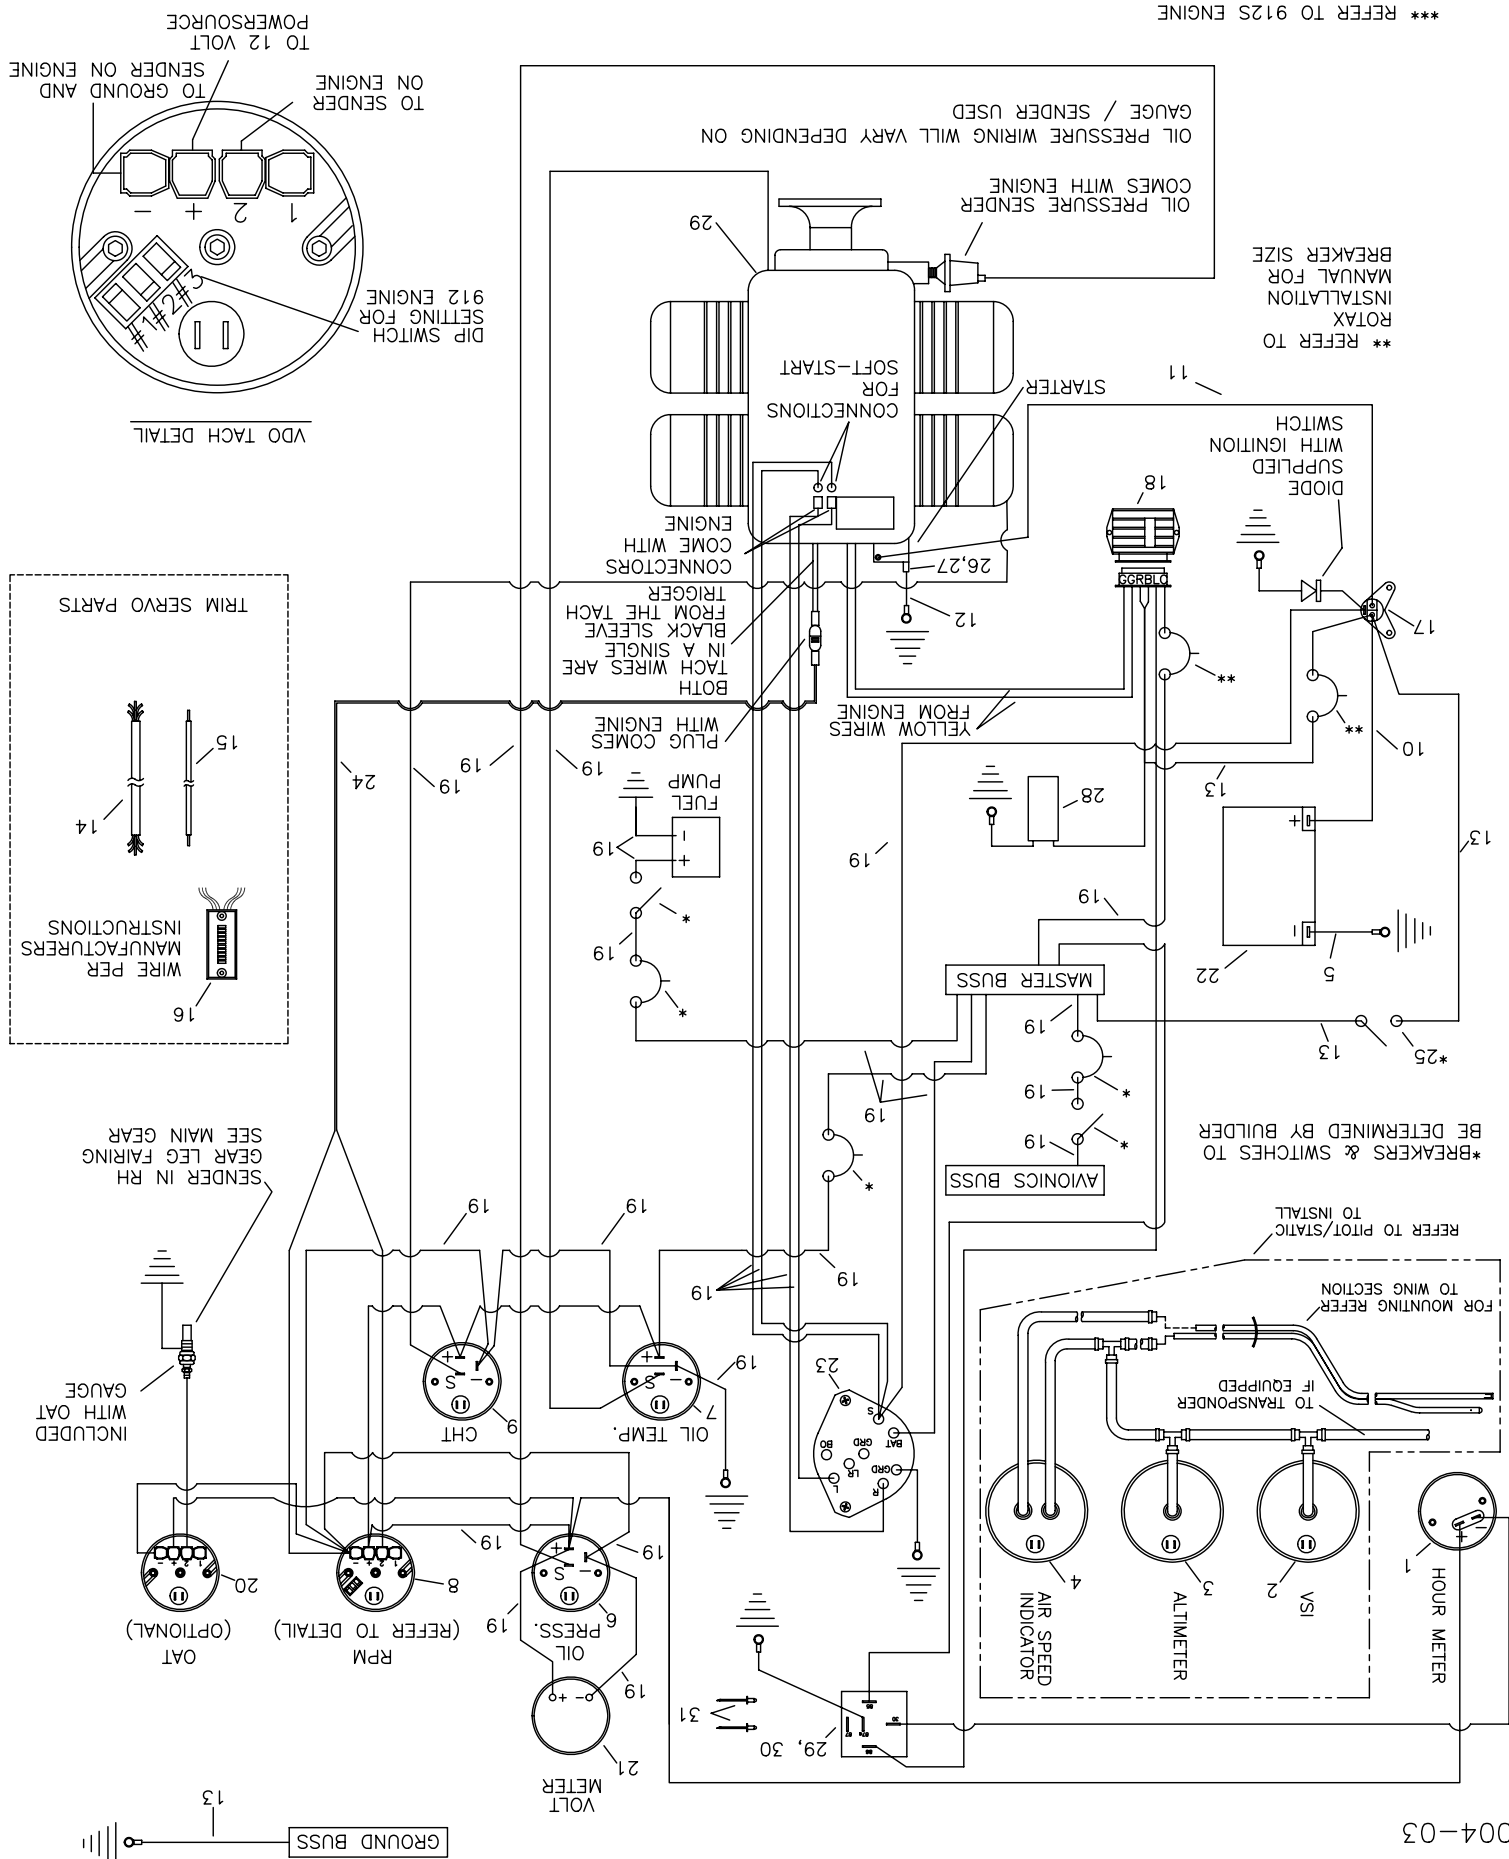

#	DESCRIPTION	PART NUMBER	QUANTITY
1.	Hour Meter - VDO*	KSPW0022	0
2.	Vertical Speed Indicator - Feet per Minute*	KSAV0008	0
3.	Altimeter*	KSAV0001	0
4.	Air Speed Indicator*	KSAV0017	0
5.	Battery/Ground Cable***	-----	0
6.	Oil Pressure Gauge*	-----	0
7.	Oil Temperature Gauge - VDO**	KSPW0017	0
8.	RPM Gauge - VDO*	KSPW0028	0
9.	Cylinder Head Temperature Gauge - VDO* **	KSPW0017	0
10.	Battery/Solenoid Cable***	-----	0
11.	Solenoid/Starter Cable	KAES0003	1
12.	Starter/Ground Cable	KAES0007	1
13.	12 Gauge Wire*	-----	0
14.	5 Wire Bundle - 26 Gauge Wire	KSES0022	26 ft
15.	20 Gauge Wire*	-----	0
16.	Trim Position Indicator****	-----	0
17.	Solenoid ****	-----	0
18.	Regulator/Rectifier ****	-----	0
19.	14 Gauge Wire*	-----	0
20.	Outside Air Temperature Gauge Kit - VDO*	KSIP0009	0
21.	Voltmeter - VDO*	KSES0009	0
22.	Battery, 912***	-----	0
23.	Ignition Switch	KSES0027	1
24.	2 Plex - 20 Gauge Wire*	-----	0
25.	Master Switch*	-----	0
26.	1/4" Bolt	AN4-10A	1
27.	1/4" Steel Shear Nut	AN364-428C	1
28.	Capacitor - 22,000 microFarad / 25v *	-----	0
29.	Hour Meter Relay Assembly	KAES0016	1
30.	Relay Mount Bracket	KPES0025	1
31.	1/8" Stainless Steel Rivet	CCPQ-41	2

*Optional or Builder supplied **Oil Temperature & CHT use the same type of gauge.

Referenced from 912 battery box installation. *Supplied with engine.

*****Reference Mac Servo Kit.

1/21/2010